


Cat. No. CA078104

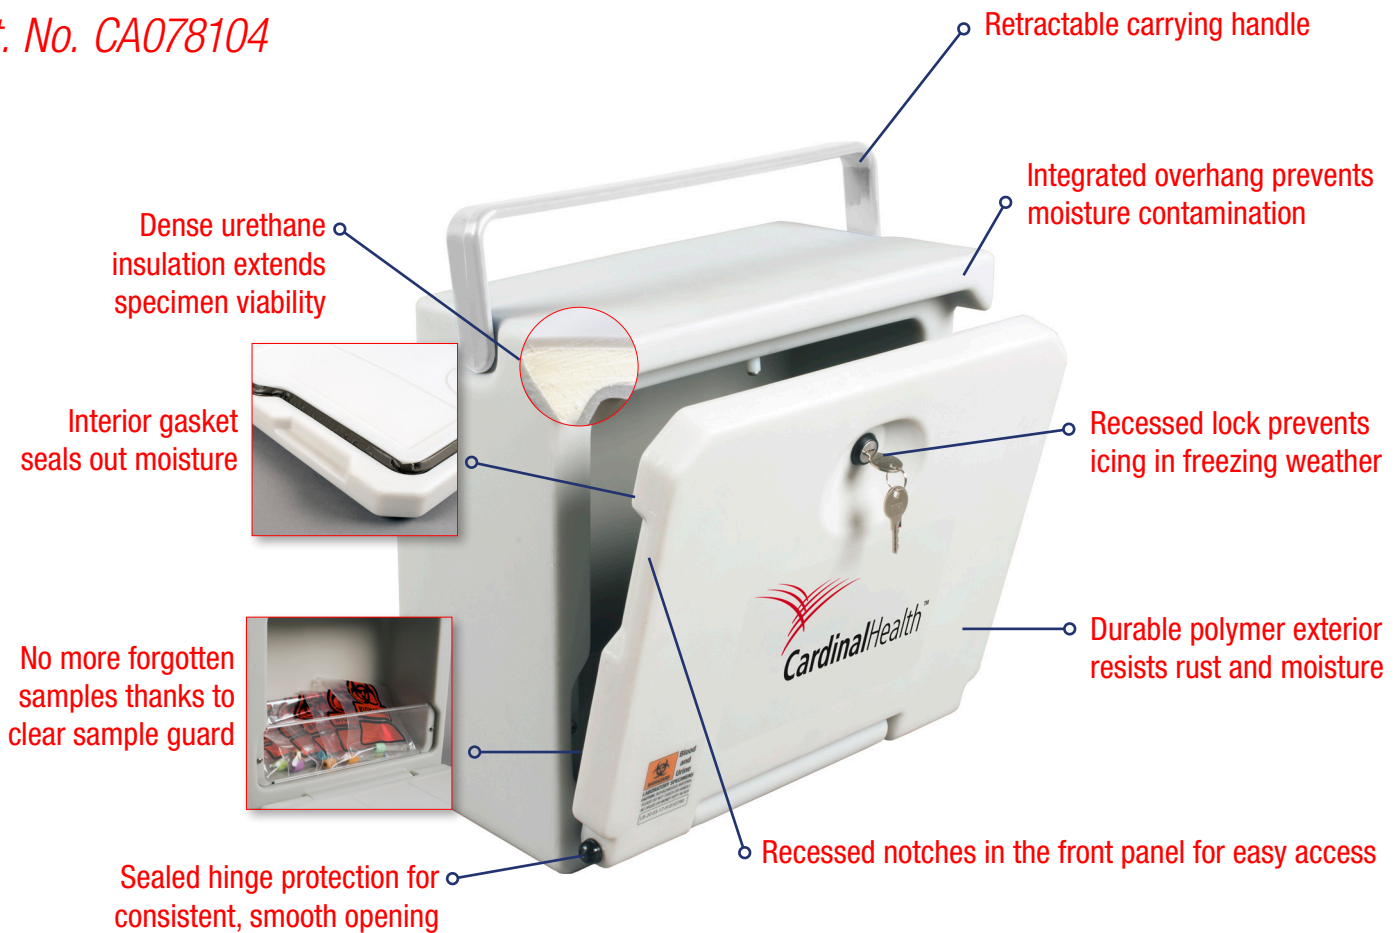


Can pay for itself in one day of bad weather

Heat and cold can both render specimens unusable. If a site collects six samples in a day and sets them outside for collection in a standard metal lockbox, extreme temperatures could ruin all six samples, at a cost of up to \$350 in re-draws. With a SampleSafe protecting the specimens, no re-draws are required - a \$350 savings, more than double the retail price of the lockbox.

Time to Overheat Comparison

100°F (38°C) Outside Temperature, with Cold Pack



Insulated Steel Box

SampleSafe™ Lockbox

Time to Freezing Comparison

15°F (-9°C) Outside Temperature



Insulated Steel Box



SampleSafe™ Lockbox

FRONT LOAD LOCKBOX

Height 14 in. / 35.56 cm
 Width 15 in. / 38.1 cm
 Depth 8 in. / 20.32 cm
 Weight 11.5 lbs. / 5.22 kg
 Internal Volume 570 in³ / 9,340.62 cm³
 Warranty 5 years





Front Load Lockbox
 Cat. No. CA078104

Also available:







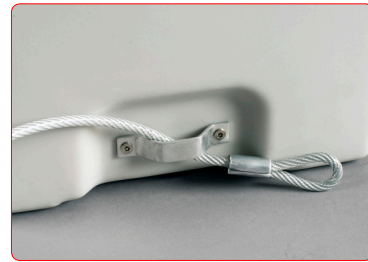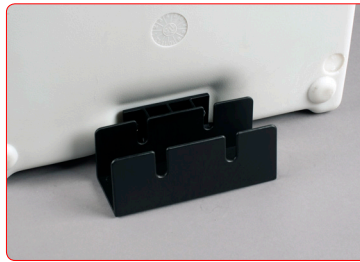


Top Load Lockbox
 Cat. No. CA071104



Secure anti-theft mounting options (door hanging, under door, or security cable).

OPTIONAL ACCESSORIES

| ANTI-THEFT DEVICES | | PART NUMBER |
|---|--------------------------------------|----------------|
|  | Door Hanging Bracket - 24" | 02-004-0-0007 |
|  | Door Hanging Bracket - 36" | 00-078-109-000 |
|  | Under Door Bracket Kit | 02-004-0-0002 |
|  | Anchor Bracket Kit (Use with Cable) | 02-004-0-0003 |
|  | Anchor Cable (6 Foot) | 03-1-0012-0054 |
|  | Wall Mounting Kit (Bracket & Screws) | 02-004-0-0009 |
| FOR ADDITIONAL PERFORMANCE | | PART NUMBER |
|  | Cold Pack (6" x 9" x .8") | 03-1-0012-0053 |